


Landmark®

Three KSUs offer fully digital features and capabilities with a range of line/station capacities.

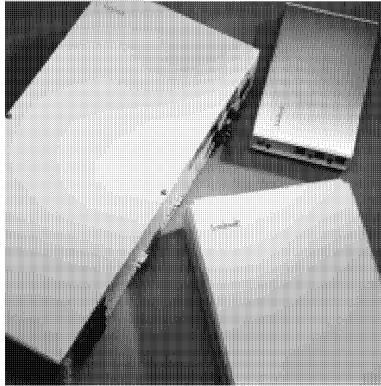

▲ DKS 308XL, DKS 1224, and DKS 50

Specifications:

DKS 308XL

Intercom Circuits: 8
Power Dissipation: 38W
Power Requirements: 24V, 1A
Cabinet Dimensions:
12.8" x 8.9" x 2.8"
Weight: 3 lbs. 6 oz.

DKS 616

Intercom Circuits: 16
Power Dissipation: 54W
Power Requirements: 24V, 1.5A
Cabinet Dimensions:
12.8" x 8.9" x 2.8"
Weight: 4 lbs. 2 oz.

DKS 1224

Intercom Circuits: 24
Power Dissipation: 80W
Power Requirements:
110/220V, 2A
Cabinet Dimensions:
19.8" x 9.4" x 3.8"
Weight: 14 lbs. 12 oz.

Cable Requirements: KSU to telephone box: 25 pair, male (RJ21) connectors. To Station: Up to 1,000' of 24AWG twisted pair. 2 conductors per station.

*Operating Environment:
40 Degrees F to 120 Degrees F*

*FCC Registration Number:
D6XIND-75023-MF-E CO/PBX
Line Ringer Equivalence: 1.2B*

Important features of the Landmark KSUs:

- Account Code
- Alarm Clock
- Alphanumeric Display
- Attendant Station
- Automatic Hold
- Automatic Line Selection
- Background Music*
- Battery Memory Back-Up
- Busy Lamp Field
- Call Again
- Call Forward
- Call Operator/Attendant
- Call Park
- Call Park Answer
- Call Pick-Up (Group)
- Camp On (Busy Line)
- Class of Service
- Conference (4 Way)
- Data Call
- Data Rate Selection
- Date and Time Display
- Dial Access to Features
- Dial Intercom Non-Blocking
- Dial Pulse to DTMF Conversion
 - Direct Dialing In
 - Direct Inward System Access
 - Discriminating Ringing
 - Distinctive Ringing
 - Do-Not-Disturb
 - Do-Not-Disturb Override
 - Door Phone Compatibility
 - Dual DSS/SPD Function Keys
 - Dual Voice Path
 - End-to-End Signaling
 - Exclusive Hold
 - External Call Forward
 - External Music Source Interface*
- Feature Assignment
- Flash
- Flexible Line Assignment
- Handsfree Answerback
- Headset Compatibility
- Hearing Aid Compatibility
- Hold
- Hold Reminder
- Last Number Redial
- LCD Contrast Level Adjustment
- Line Pool Assignment
- Long DTMF Tones
- Manual Line Access
- Message Waiting
- Message (Advisory)
- Music-on-Hold*
- Mute
- Night Service
- Off-Hook Voice Announce
- Paging
- Pause
- PBX Compatibility
- Power Failure Transfer
- Private Line
- Programmable DTMF Tone Duration
- Programmable User Feature Keys
- Recall (Delayed Ring Transfer)
- Release
- Remote Programming*
- Ringing Line Assignment
- Saved Number Redial
- Shift
- Simultaneous Data/Voice Compatibility
- Soft Keys
- Speed Dialing (Station and System)
- Station Group Assignment

- Station Lock/Unlock
- Station Message Detail Recording*
- System Alarm
- Toll Restrictions
- Transfer
- User Name Programming
- Voice Call
- Volume Control
- Wall Mountable

** Standard on DKS 1224 only.
DKS 308/616 need DKS 55.
Other equipment (music source,
modem, etc.) may be required.*

DKS 50 Analog Terminal Adapter

The Analog Terminal Adapter allows the connection of other equipment to the Landmark® system, such as: analog telephones, voice mail, fax machines, answering machines and modems. Each adapter converts one digital station port into two connections for single line equipment.

Dimensions: 9.8" x 5.6" x 1.4"
Weight: 1 lb. 1 oz.